



ALUMINUM ZOLA CLASSIC ALU SLIMLINE™

The Zola Alu SlimLine system is designed for architectural projects that prioritise the combination of minimalist aesthetics, high-quality thermal insulation and Invisible (hidden vent) drainage. Available in double or triple glazing to match your performance requirements.

PERFORMANCE

Frame Depth = 105mm (4.13")

Frame Width
Fixed = 35mm (1.38")
Operable = 75mm (2.94")

NFRC Values:

Fixed

U = 0.31 Btu/(h.ft².F)

SHGC = up to 0.46

VT = 0.64

Operable

U = 0.33 Btu/(h.ft².F)

SHGC = up to 0.47

VT = 0.64

CE Values:

U_w = 1.0 W/(m²K)

U_g = 0.53 W/(m²K)

U_f = 1.75 W/(m²K)

Ψ = 0.050 W/mK

STC / OITC Values:

STC upto 39

OITC upto 32

AAMA CW Values

PG60 (Fixed)

PG60 (Tilt-Turn)

FINISH OPTIONS

Interior and Exterior: RAL powder coated, Textile Series, and Anodized options.


CONFIGURATIONS AVAILABLE

Fixed

Tilt-turn, Tilt-only, Turn-only, Tilt-first

Fixed/Operable combinations

French window opening

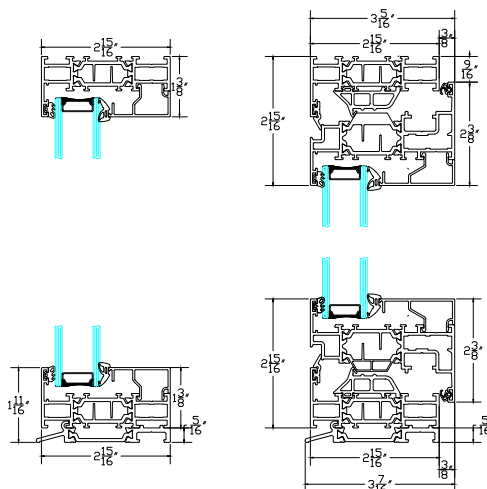

HARDWARE

European multi-point locking system with upto eight locking points on windows and four points on entry doors. Visible hinges are standard but concealed hinges are available.



All performance data based on typical assemblies. Discuss specific performance values with a Zola Project Manager

Questions? Contact us for assistance at 303.578.0001